

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 177 779 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
06.02.2002 Bulletin 2002/06

(51) Int Cl.<sup>7</sup>: **A61F 2/06**

(21) Application number: 01118408.2

(22) Date of filing: 31.07.2001

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• Matsutani, Masaaki  
Shioya-gun, Tochigi-ken (JP)  
• Fukuda, Masatoshi  
Shioya-gun, Tochigi-ken (JP)  
• Fukuda, Shoichi  
Shioya-gun, Tochigi-ken (JP)

(30) Priority: 31.07.2000 JP 2000231267

(71) Applicant: Mani, Inc.  
Shioya-gun, Tochigi-ken (JP)


(74) Representative:  
Patentanwälte Westphal, Mussnug & Partner  
Waldstrasse 33  
78048 Villingen-Schwenningen (DE)

**(54) Stent and method of manufacturing**

(57) Making a stent in accordance with information regarding tubular living-body tissue of each individual for treating such as aneurysm.

A stent A is formed by a mechanical method using a machine tool controlled in accordance with shape-information regarding tubular living-body tissue of each individual so as to match with an inner shape of the tubular living-body tissue of each individual, wherein said shape-information is obtained by a mechanical method such as ultrasonic tomogram (US), computer tomography (CT), or magnetic resonance imaging (MRI). More particularly, it is preferable to make the stent A by using a master B being formed in accordance with shape-information of a tubular tissue and having a shape substantially similar to an inner shape of the tubular tissue, and then, restraining the shape of the stent A in correspondence with the master B so as to performing a shape-memorization process.

**FIG. 1**

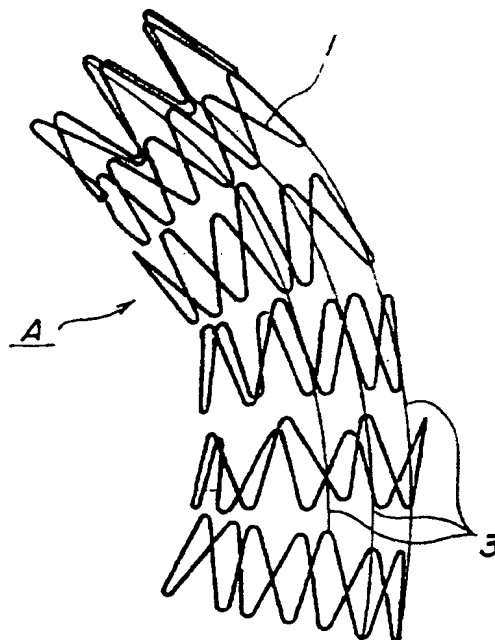

**EP 1 177 779 A2**

## Description

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

[0001] This invention relates to a method for manufacturing a stent for treating internal tubular organs such as a blood vessel, and more particularly, for treating aneurysm.

#### 2. Description of Related Art

[0002] Inside a body, there are many tubular tissues, such as a blood vessel, a bile duct, a ureter, an esophagus, or the like; such organs bear a possibility of characteristic ailments such as stenosis or occlusion. For example, in respect of blood vessels, there are possibilities of ailments such as stenosis, occlusion, aneurysm, varicosity, and the like. More particularly, since aneurysm is a serious ailment where a rupture of a blood vessel causes excessive bleeding, prompt treatment is to be required, and various tools have been developed for treating thus ailment effectively.

[0003] Lately, the use of a metallic cylindrical tool called a stent is increasingly used for treating a portion of blood vessel stenosis or for treating aneurysm. For example, when treating aneurysm, a stentgraf, which covers the stent with an artificial blood vessel, is used; such stentgraf is positioned in place at the inner side of the aneurysm so that pressure of blood would not affect the aneurysm.

[0004] As for examples regarding the kinds of stents, there is a cylindrical stent made from a metal material (representatively from stainless steel) or a stent having a metal wire bent in a zigzag manner while at the same time having a cylindrical shape. Such stents are delivered to an affected portion internally through a blood vessel and positioned in place when reaching the affected portion.

[0005] In a case of stationing the stent at the affected portion, the stent is diametrically shrunk and confined within a long tubular delivery kit, in which the delivery kit has a guiding wire inserted therethrough; and then, starting from the guiding wire, the delivery kit is guided through a blood vessel from a root of a leg till reaching the affected portion, and then, when reaching the affected portion, the delivery kit is retracted to release the stent from confinement. After being released from confinement, the stent diametrically self-expands, and is positioned in place at the affected portion in thus expanded state for protecting the blood vessel.

[0006] The stent being positioned in place should preferably be stuck closely to an inner wall of a tissue without having any gap and should apply a suitable expanding force upon the inner wall. For example, having a gap between the stent and the inner wall of the tissue would be the cause for disorder of blood flow and result

to a thrombus and the like; further, there would be a risk of the stent becoming out of place from the affected portion if the expanding force is too weak, and there would be a risk of the tissue becoming constricted and result to necrosis if the expanding force is too strong.

[0007] In general, the thickness and shape of a tubular living-body tissue for each individual are different. However, there is a problem that the stent cannot always correspond to the different thickness and shape of an organic tubular tissue for each individual since the stent has a predetermined diameter and straight line shape. Accordingly, heightening the flexibility of a straight shaped stent to allow the stent to become closely stuck to the inner wall of the tissue, is proposed.

[0008] Nevertheless, in correspondence with the heightening the flexibility of the stent, the strength of the stent would decrease and result to a decrease in expanding force; further, the stent would become easily compressed in an axial direction to cause a risk of becoming drawn toward an aneurysm.

[0009] It is an object of this invention to provide a stent manufactured based on the information regarding tubular living-body tissue for each individual, and to provide a method of manufacturing the stent.

#### SUMMARY OF THE INVENTION

[0010] In means to solve the aforementioned problems, the stent for this invention is formed by a mechanical method to match with an inner shape of a tubular living-body tissue of each individual, in accordance with shape-information regarding the tubular living-body tissue of each individual, wherein the shape-information is obtained by a mechanical method.

[0011] Since the shape of the foregoing stent matches with the shape of the tubular living-body tissue of the targeted individual, the stent could stick closely to an inner wall of the tubular tissue while applying thereto a suitable expanding force and could be steadily positioned in place, when the stent is positioned in place at an internal targeted portion. More particularly, the tubular tissue slightly bends and bears changes in diameter depending on the individual, the function, or the portion thereof. Accordingly, the stent, being formed in accordance with the shape-information of each individual, could be stuck closely to the inner wall of the tubular tissue in a satisfactory manner when precisely positioned in place at the targeted portion.

[0012] As a means for obtaining tubular living-body information of an individual, there are methods such as a method using roentogen, ultrasonic tomogram (US), or computer tomography (CT), or magnetic resonance imaging (MRI), in which three dimensional information could be extracted from the information from such methods. Accordingly, based on such information, the aimed stent could be manufactured by a mechanical method using for example a numerical control (NC) machine tool, such as an NC lathe, an NC milling machine, or a

machining center.

[0013] Another stent regarding this invention is formed to match with an inner shape of a tubular living-body tissue of each individual by performing shape-memorization in correspondence to a master, in which the master has an inner surface or outer surface with a shape being substantially similar to the inner shape of the tubular living-body tissue of each individual and being formed in accordance with shape-information obtained by a mechanical method.

[0014] In respect of the foregoing stent, since shape-memorization is performed in correspondence to the master being formed in accordance with the mechanically obtained shape-information of the tubular tissue of an individual, the stent having returned back to the memorized shape bears a shape substantially equal to that of the targeted tubular tissue of the individual, and maintains a steady state in a manner applying a suitable expanding force upon the tubular tissue when positioned in place at a targeted portion.

[0015] When performing treatment by positioning the stent in place at the portion targeted for treatment, in means to heighten the sticking degree upon the targeted portion, the outer diameter of the stent is required to be substantially equal to or slightly larger (although there is a difference depending on the shape of the targeted portion or the like, up till approximately two times larger than the shortest diameter of the targeted portion) than the inner diameter of the portion targeted for treatment. In such case, since the outer diameter of the stent would be the sum of the outer surface or inner surface of the master added to the thickness of the material comprising the stent, the diameter for the outer surface or the inner surface of the master is determined by taking into consideration the thickness of the stent. Accordingly, the inner surface or outer surface of the master is required to be substantially similar to the shape of the inner surface of the tubular tissue (hereinafter the same).

[0016] A method of manufacturing a stent regarding this invention serves to manufacture a stent matching with the inner shape of the tubular living-body tissue of each individual by comprising the steps of: obtaining inner shape-information regarding tubular living-body tissue of each individual by using a mechanical method; making a master in accordance with the shape-information in which the master has a three dimensional inner surface or outer surface substantially similar to the inner shape of the tubular living-body tissue; and performing shape-memorization in a manner corresponding to the master.

[0017] With the foregoing method of manufacturing a stent, a three dimensional master could be made in accordance with the shape-information regarding the tubular living-body tissue of each individual, wherein the shape-information is obtained by a mechanical method. By performing shape-memorization using the master, a stent which is capable of returning back to the memorized shape substantially equal to that of the tubular tissue of

the targeted individual, could be manufactured.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The above and other objects and features of the invention are apparent to those skilled in the art from the following preferred embodiments thereof when considered in conjunction with the accompanied drawings, in which:

FIG.1 is an explanatory view showing an example of a stent for use during treatment of aneurysm;

FIG.2 is a view showing a thoracic descending aorta as an example of a portion for treatment;

FIG.3 is a view for explaining a shape of a master;

FIG.4 is an explanatory front view showing a state where a wire made from a shape memorizing alloy is wrapped around a master;

FIG.5 is view V of FIG.4; and

FIG.6 is view VI of FIG.4.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0019] The stent of this invention is processed for matching with an inner shape of a tubular tissue by obtaining three dimensional shape-information of tubular living-body tissue, that is, an affected portion, by means of a mechanical method such as roentgen, ultrasonic tomography (US), computer tomography (CT), magnetic resonance imaging (MRI), and then, using a mechanical method such as a machine tool controlled on the basis of the information.

[0020] Accordingly, the processed stent has no interchangeability between other patients, and is formed as an exclusive stent only for a particular patient. Therefore, when positioned in place at the affected portion, the stent practically matches with the inner shape of the tubular tissue of such portion to allow the stent to contact and apply a suitable expanding force upon an inner surface of the tubular tissue, and to allow the stent to maintain a steady position, further, there is no risk of causing trouble such as necrosis upon the tubular tissue. Further, there is no risk of affecting the flow of bodily fluid since the inner surface of the stent practically matches with the inner surface of the affected portion.

[0021] The stent is not inserted and positioned in place by means of cutting open the targeted portion for treatment, but instead, is guided inside from the external, conveyed and positioned in place when reaching the targeted portion for treatment. Accordingly, during the process of conveying the stent to the targeted portion for treatment, it is preferable to allow the stent to maintain a shrunken state having a small diameter, and to allow expansion to the original diameter of the stent when reaching the targeted portion for treatment.

[0022] As for the material of the stent having the aforementioned characteristics, a metal material bearing

elasticity and flexibility without harming living body tissue such as stainless steel or shape-memorizing alloy of Nickel (Ni) and Titanium (Ti), or a synthetic resin material capable of releasing expanding force by having a suitable elasticity without harming living body tissue, could be selectively used.

[0023] For example, when a stainless steel block is selected as the material for manufacturing the stent with a mechanical method, the stent could be manufactured by being processed three dimensionally with use of a machine tool such as a numerically controlled (NC) milling machine or a machining center. Further, when a stainless steel pipe is selected as the material, the aimed stent could be manufactured by bending with use of a pipe processing machine such as an NC bending machine or an NC spinning machine, and drawing processing according to circumstance.

[0024] When a shape-memorizing alloyed block or pipe is selected as the material for the stent, the stent could be manufactured by using the foregoing methods. Further, when a shape-memorizing alloy wire is selected as the material for the stent, the stent could be manufactured by forming a three dimensional master based on shape-information of the tubular tissue, and then performing shape-memorization by wrapping the wire along the master and maintaining thus wrapped state. Further, when a net-like shape-memorized alloy is used as the material, the aimed stent could be manufactured by using the foregoing method.

[0025] With the foregoing stent, a stentgraf could be formed to allow the stentgraf to be positioned in place at the affected portion for performing the aimed treatment, by covering the shape-memorizing alloy wire, which has been shape-memorized by being wrapped along the master, with an artificial blood vessel or the like, in correspondence to the subject tubular tissue.

A preferable embodiment of the stent along with a method of manufacturing such stent will hereinafter be described with reference to the drawings. FIG.1 is an explanatory view showing an example of a stent for use during treatment of aneurysm; FIG.2 is a view showing a thoracic descending aorta as an example of a portion for treatment; FIG.3 is a view for explaining a shape of a master; FIG.4 is an explanatory front view showing a state where a wire made from a shape memorizing alloy is wrapped around a master; FIG.5 is view V of FIG.4; and FIG.6 is view VI of FIG.4.

[0026] It is to be noted that this embodiment of a stent A is memorized with a zigzag shape in which each tip portion of the zigzag are bent with a prescribed bending radius, as shown in FIG.1. Although, the tip portions are shown in an acutely intersecting manner in FIG.4 through FIG.5, the tip portions are also bent as in FIG.1.

[0027] The stent is applied to a tubular tissue targeted for treatment or a portion of such tubular tissue. Since the size and the measurement for the stent differs depending on the tubular tissue targeted for treatment or the portion thereof, the stent does not essentially bear

interchangeability, but instead should be processed individually in accordance with the tubular tissue targeted for treatment or the portion thereof. However, since it would become complicated to describe the shape of the stent in correspondence with each targeted tubular tissue or the portion thereof, a stent A for treating aneurysm at a thoracic descending aorta (hereinafter referred as "affected portion C") as shown in FIG.2 will be described in this embodiment.

[0028] In this embodiment, the stent A has a wire 1 being wrapped around a targeted affected portion C in a zigzag manner and is formed substantially equal to a three dimensional shape of the affected portion C and formed substantially equal to the measurement of an inner surface of the affected portion. A stentgraf is formed by covering the stent A with an artificial blood vessel in which the stentgraf is positioned in place at the affected portion C for enabling treatment by removal of the strain applied upon the aneurysm.

[0029] The thickness of the wire 1 comprising the stent A is not to be limited, and should be selected depending on the ability to withstand the force applied upon the affected portion targeted for placement. As for the material of the stent A, there are stainless steel, shape-memorizing alloy or synthetic resin in which these materials could be used selectively.

[0030] The stent A is formed based on shape-information of tubular tissue regarding the affected portion C for each individual requiring treatment. The shape-information for each subject individual is obtained selectively by means such as roentogen rays, ultra sonic tomogram (US), computer tomographic image (CT), or a magnetic resonance image (MRI).

[0031] The foregoing images could be obtained by respectively applying and operating devices upon the subject individual, and in correspondence to the taken images, three dimensional shape-information regarding the affected portion C (including information of shape and measurement) could be obtained by processing the data outputted from the devices.

[0032] Accordingly, the stent A being formed based on the obtained three dimensional shape-information of affected portion C, is inserted inside a delivery kit in a diametrically shrunken state, and then guided inside from outside of the body, and then taken out from the delivery kit when reaching the affected portion C so as to diametrically expand back to the original diameter and stick closely to the inner surface of the affected portion C while applying a suitable expanding force thereto. In this state, no gap is formed between the stent A and the inner surface of the tubular tissue, and excessive pressure would not be applied upon the tissue.

[0033] Therefore, the stent A could maintain being steadily positioned in place at the affected portion, and aneurysm could be protected from the pressure of blood at the affected portion C.

[0034] The stent regarding this invention is not to be limited to the stent A formed with the wire 1 in a wrapping

manner, but is also to include a net-like stent, or a coiling stent. In a case of using such net-like stent or coiling stent, such stents could be formed with material such as stainless steel by using a machine tool controlled according to the three dimensional shape-information of affected portion C; or could be formed with a shape-memorizing alloy such as a Ni-Ti alloy by performing shape-memorization in a manner where the stent is constrained according to the three dimensional shape-information of affected portion C.

[0035] Next, a process of forming the stent A by using a wire 1 made from a shape-memorizing alloy of Ni-Ti will be explained. In this embodiment, the wire 1 for the stent A is comprised of nickel (Ni) and titanium (Ti) in which nickel is of 56.06 % weight and the remaining thereof is titanium; further, the wire 1 has a diameter of 0.4mm.

[0036] A master B having a form matching with an aimed shape is used, when bending and forming the wire 1 made from the shape-memorizing alloy of Ni-Ti into a cylindrical shape. An outer surface 2 of the master B has a three dimensional shape which is substantially similar to a shape of an inner surface of the affected portion C targeted for the stent A.

[0037] The outer surface of the master B is formed by using a mechanical method in accordance with the three dimensional shape-information of the affected portion B being the individual's targeted portion for treatment, wherein the shape-information is obtained by mechanical methods such as roentogen rays, US, CT, MRI. Accordingly, the inner surface of the affected portion C could be altered to the outer surface 2 of the master B having a substantially similar shape to the inner surface so as to form the stent A with a shape in correspondence to that of outer surface 2; subsequently, the inner surface of the affected portion C and the inner surface of the stent A could precisely match when the stent A is positioned in place at the affected portion C.

[0038] After the thus formed outer surface 2 of the master B is wrapped in a zigzag manner as well as a belt-like manner by the wire 1, as shown in FIG.4 through FIG.6, a shape-memorization process is performed. The measurement regarding the detail of the zigzag shaped wire 1 is not to be limited in particular, but is to be set in accordance with conditions such as the thickness of the affected portion C or the bending shape thereof. For example, when the affected portion C is of a substantially thick portion, as in this embodiment, the length of the zigzag shape in the axial direction is set to approximately 25mm.

[0039] Further, the zigzagging peak portions are formed by bending the wire 1. The manner in bending the peak portions have a large influence on performance during the diametral shrinkage of the stent A. That is, the smaller the bending radius of the peak portion is, the higher the diametral shrinking performance would become and the easier the fracture of the wire would become. Further, the larger the bending radius of the peak

portion is, the poorer the diametral shrinking performance would become and the more difficult the fracture of the wire would become. Accordingly, since the diametral shrinkage and the tendency of fracture are contradictory characteristics, and the most suitable bending radius is set depending on conditions such as the function or portion of the tubular tissue subject for treatment. In this embodiment, the bending radius of the peak portion is set to 0.5mm.

[0040] One method of wrapping the outer surface 2 of the master B with the wire 1 is performed by bending a single wire 1 in a zigzag shape and wrapping in spiral manner, while the other method is performed by forming a wire 1, which is already shape-memorized with a zigzag shape, into a ring-shape and wrapping by arranging the wire 1 in an axial direction of the master B. Both of the methods of wrapping the outer surface 2 of the master B with the wire 1 could allow stent A to be formed in a same manner.

[0041] When the wire 1 is wrapped to the outer surface 2 of the master B, plural vertical wires 3 are arranged in an axial direction of the master B and are connected to the wire 1 so as to restrain the position of the wire 1 for the master B in an axial direction. Accordingly, the position in the axial direction and the entire bending shape for the wire 1 being wrapped around the master B are defined by the vertical wires 3. Same as the wire 1, a shape-memorizing alloy of Ni-Ti are used for the vertical wires 3; one through five vertical wires 3 (in this embodiment, three wires) are arranged depending on the conditions of the affected portion C.

[0042] When the stent A is bent three dimensionally, it is desirable for positioning the vertical wires 3 at the outer side of the bent shape (the side with large bending radius); more particularly, when the affected portion C is an aneurysm, it is desirable for positioning the vertical wires 3 at the side where the aneurysm is created.

[0043] When wrapping the outer surface 2 of the master B with the wire 1, it is necessary for the wire 1 to be stuck closely to the outer surface 2. However, owing to the zigzag shape of the wire 1, sticking closely would be difficult just by wrapping around the outer surface 2. Therefore, after the wire 1 is wrapped around the outer surface 2 of the master B, the wire 1 is stuck closely to the outer surface 2 by tightening a belt-wire 4 made from pure titanium wire over the wire 1.

[0044] Subsequently, a shape-memorization process is performed by maintaining the state of having the wire 1 wrapped around the outer surface 2 of the master B, and then by heating. The memorization process is a heating process in which, the wire is maintained for a prescribed time within a vacuum-heating furnace set with a temperature ranging from 400°C through 550°C, and then, the wire is cooled.

[0045] In this embodiment the memorization process is performed by combining the following conditions in which, a vacuum degree of the vacuum-heating furnace is set to approximately  $10^{-2}$  through  $10^{-3}$  Pa, the tem-

perature is set to 400°C, 450°C, 500°C, 550°C, and the processing time is performed in 30 minutes, 60 minutes.

[0046] After the memorization process, the wire 1 is detached from the outer surface 2 of the master B to form a stent A capable of returning to the memorized shape under prescribed conditions.

[0047] The thus structured stent A is folded in a peripheral direction and diametrically shrunken for being inserted into the delivery kit, and then, is guided into the affected portion C via the blood vessel, and then, returns to the memorized shape reacting to the temperature of body heat when taken out from the delivery kit at the affected portion C. In such occasion, even when the affected portion C is bent or has a diameter transformed in-between, the stent A could stick closely to the inner surface in an extremely steady manner since the stent A is formed already having such conditions taken into consideration.

[0048] The outer shape 2 of the master B is formed with a three dimensional shape substantially similar to that of the inner surface of tubular tissue regarding the affected portion C. However, the outer surface 2 is not necessarily required to be substantially similar to the inner surface of the affected portion C, and instead, the inner surface of the master B could be formed substantially similar. In other words, either the outer surface 2 or the inner surface of the master B could be formed with a substantially similar shape to that of the inner surface of the affected portion C.

[0049] Further, a metal material, which is capable of enduring to the temperature during the heating of the memorizing process for the wire 1, is required to be used for the master B. As for such material, there are ferrous metal such as stainless steel or carbon steel, or non-ferrous metal such as copper or copper alloy. When manufacturing the master B, it is desirable to use an NC machine tool controlled in accordance with the three dimensional shape-information of the affected portion C.

[0050] Since the stent A is of a tubular shape, the master B could also be formed into a tubular shape. That is, a material such as a stainless steel pipe could be used for forming the master B, in which the stainless steel pipe could be processed by bending with a numeric control bending machine or a spinning machine and applied with a drawing process according to circumstance.

[0051] Further, when making the master B, machining a metal material is not necessarily required, and instead, a mold of a synthetic resin could be made based on the shape-information of the affected portion C, and the so-called casting method where metal is poured into the mold could be used.

[0052] In consequence, in respect of the foregoing stent for this invention, since three dimensional shape-information of a portion targeted for treatment regarding an individual requiring treatment is obtained beforehand by a mechanical method so as to allow the forming of the stent based on the shape-information, the stent could be stuck closely to the inner wall of the targeted

portion in a desirable manner without obstructing the flow of bodily fluid when the stent is positioned in place at the targeted portion for treatment. Further, the stent would not apply excessive force upon the inner wall of the portion targeted for treatment and would not cause necrosis of the inner wall of thus portion.

[0053] Further, in respect of another stent regarding this invention, since a memorization process is performed by restraining the shape of the stent corresponding to the master being made in accordance with three dimensional information of the portion targeted for treatment, the stent could return to the memorized shape and back to the original diameter when taken out from the delivery kit after being delivered to the portion targeted for treatment. Subsequently, the stent having returned to the original diameter could stick closely to the inner wall of the portion targeted for treatment in a desirable manner for enabling treatment of thus portion.

[0054] Further, in respect of another stent regarding this invention, since the inner surface or the outer surface of the master is formed with a shape substantially similar to the three dimensional shape of the portion targeted for treatment, a stent having memorized the shape of the portion targeted for treatment could be manufactured by performing shape-memorization by restraining the form of the stent in accordance with the master.

[0055] The foregoing description of a preferred embodiment of the invention has been presented for purposes of illustration and description, and is not intended to be exhaustive or to limit the invention to the precise form disclosed. The description was selected to best explain the principles of the invention and their practical application to enable others skilled in the art to best utilize the invention in various embodiments and various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention not be limited by the specification, but be defined by the claims set forth below.

## Claims

1. A stent being formed by a mechanical method in accordance with shape-information regarding a tubular living-body tissue of each individual so as to match with an inner shape of the tubular living-body tissue of each individual, wherein said shape-information is obtained by a mechanical method.
2. A stent being formed to match with an inner shape of a tubular living-body tissue of each individual by performing shape-memorization in a manner corresponding to a master, wherein the master has an inner surface or outer surface with a shape being substantially similar to the inner shape of the tubular living-body tissue of each individual and being formed in accordance with shape-information ob-

tained by a mechanical method.

3. A method of manufacturing a stent so as to manufacture a stent matching with an inner shape of a tubular living-body tissue of each individual by comprising the steps of: 5

obtaining the inner shape-information regarding the tubular living-body tissue of each individual by using a mechanical method; 10  
making a master in accordance with the shape-information in which the master has a three dimensional inner surface or outer surface substantially similar to the inner shape of the tubular living-body tissue; and 15  
performing shape-memorization in a manner corresponding to the master.

20

25

30

35


40

45

50

55

FIG. 1

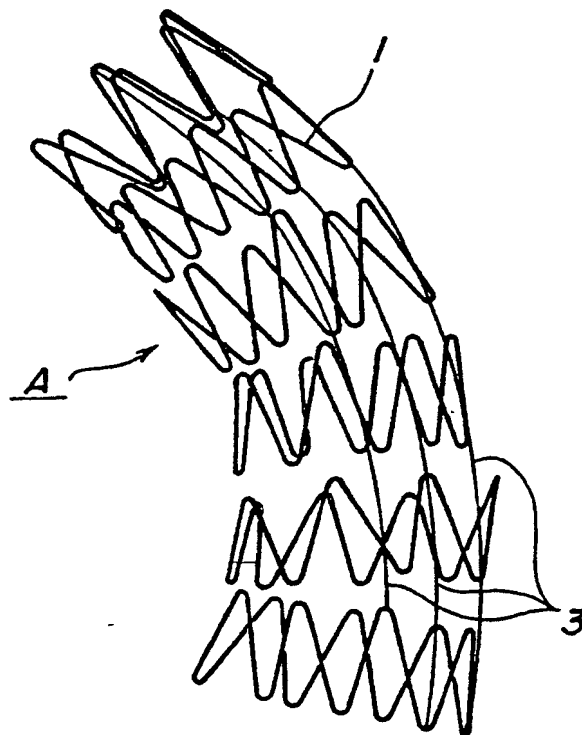

BEST AVAILABLE COPY



FIG.2

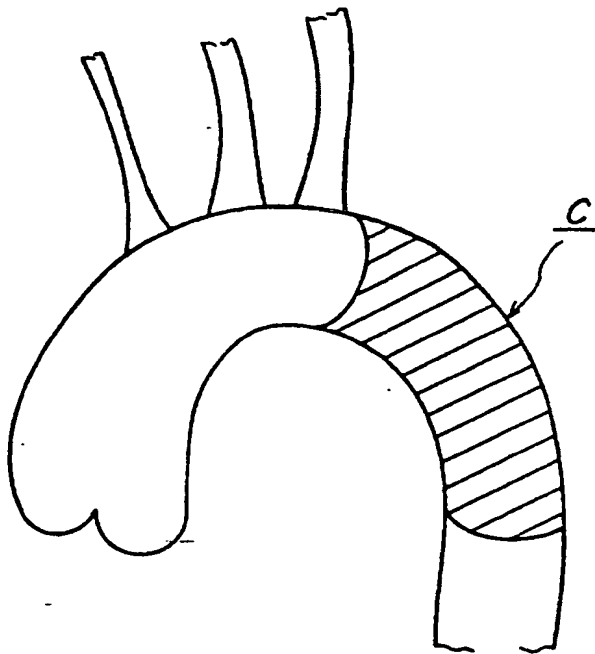


FIG.3



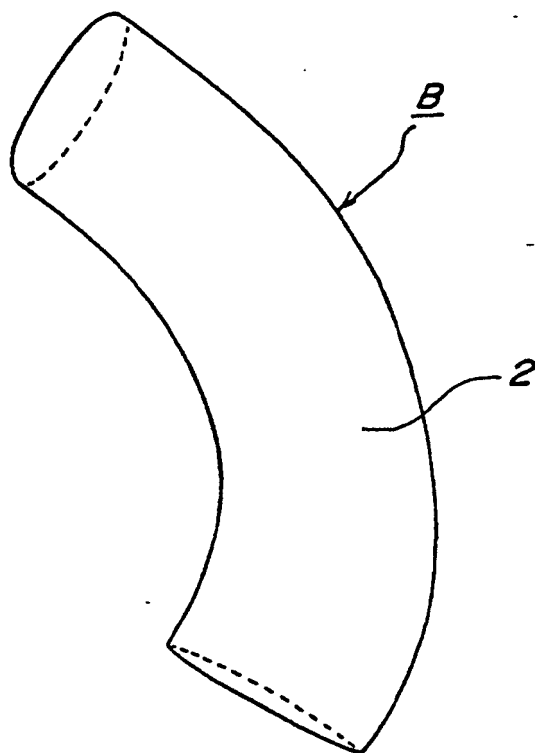


FIG.4

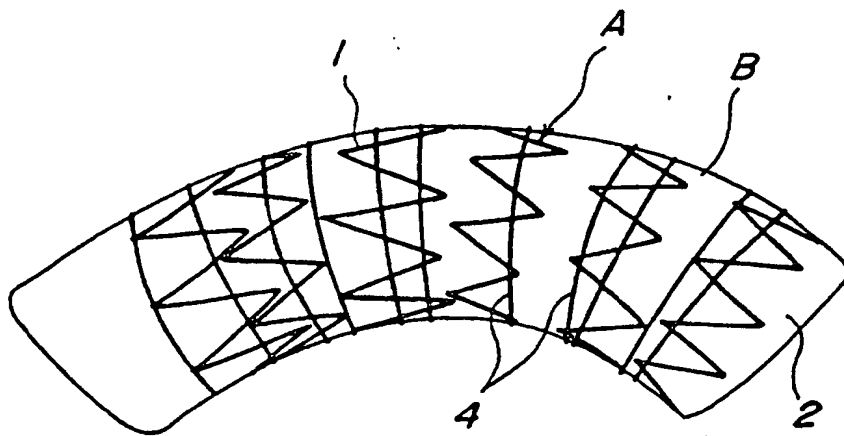


BEST AVAILABLE COPY

FIG.5

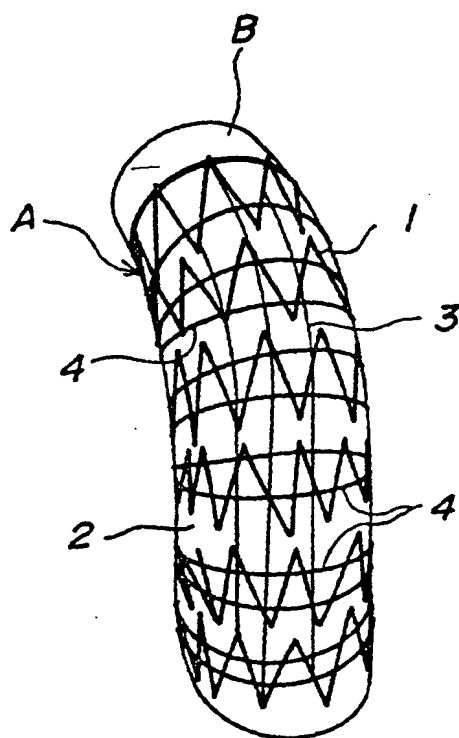

BEST AVAILABLE COPY

FIG.6

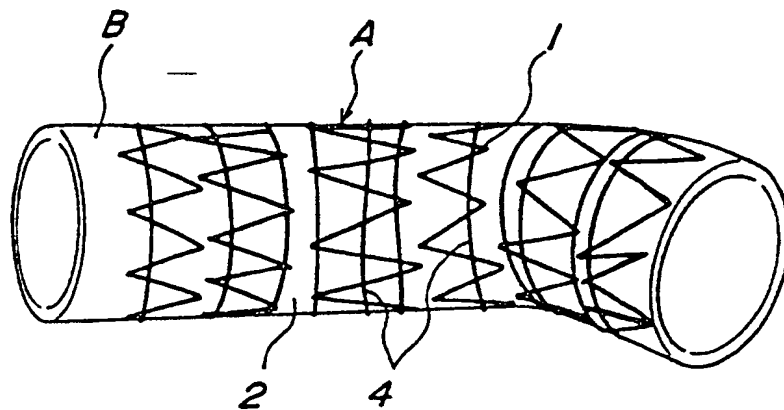

BEST AVAILABLE COPY

**THIS PAGE BLANK (USPTO)**

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 177 779 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
14.01.2004 Bulletin 2004/03

(51) Int Cl.7: **A61F 2/06**

(43) Date of publication A2:  
06.02.2002 Bulletin 2002/06

(21) Application number: **01118408.2**

(22) Date of filing: **31.07.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: **31.07.2000 JP 2000231267**

(71) Applicant: **Mani, Inc.**  
**Shioya-gun, Tochigi-ken (JP)**

(72) Inventors:  
• **Matsutani, Masaaki**  
**Shioya-gun, Tochigi-ken (JP)**  
• **Fukuda, Masatoshi**  
**Shioya-gun, Tochigi-ken (JP)**  
• **Fukuda, Sholchl**  
**Shioya-gun, Tochigi-ken (JP)**


(74) Representative: **Patentanwälte**  
**Westphal, Mussnug & Partner**  
**Am Riettor 5**  
**78048 Villingen-Schwenningen (DE)**

(54) **Stent and method of manufacturing**

(57) Making a stent in accordance with information regarding tubular living-body tissue of each individual for treating such as aneurysm.

A stent A is formed by a mechanical method using a machine tool controlled in accordance with shape-information regarding tubular living-body tissue of each individual so as to match with an inner shape of the tubular living-body tissue of each individual, wherein said shape-information is obtained by a mechanical method such as such as ultrasonic tomogram (US), computer tomography (CT), or magnetic resonance imaging (MRI). More particularly, it is preferable to make the stent A by using a master B being formed in accordance with shape-information of a tubular tissue and having a shape substantially similar to an inner shape of the tubular tissue, and then, restraining the shape of the stent A in correspondence with the master B so as to performing a shape-memorization process.

*FIG.1*

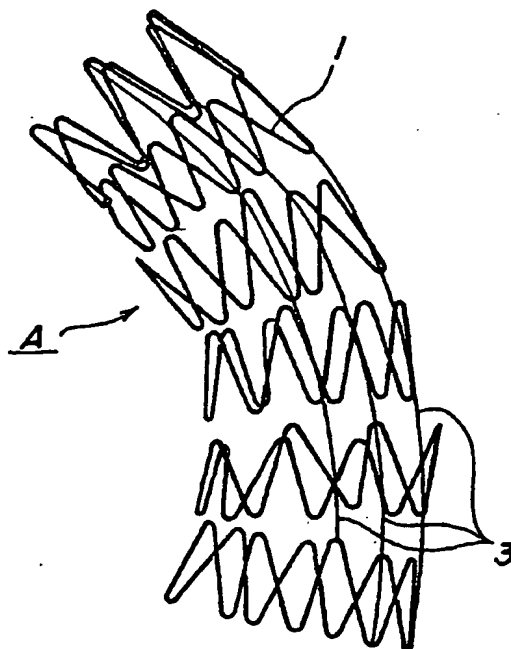

**EP 1 177 779 A3**



European Patent  
Office

# PARTIAL EUROPEAN SEARCH REPORT

Application Number

which under Rule 45 of the European Patent Convention EP 01 11 8408 shall be considered, for the purposes of subsequent proceedings, as the European search report

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	US 5 554 181 A (DAS GLADWIN S) 10 September 1996 (1996-09-10) * column 3, line 39 - line 67 *	3	A61F2/06
Y	US 5 766 237 A (CRAGG ANDREW H) 16 June 1998 (1998-06-16) * column 3, line 46 - line 63 *	3	
Y	US 5 147 370 A (MCNAMARA THOMAS O ET AL) 15 September 1992 (1992-09-15) * column 6, line 15 - line 28 *	3	
A	US 5 830 179 A (MIKUS PAUL ET AL) 3 November 1998 (1998-11-03) * the whole document *	3	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			A61F
INCOMPLETE SEARCH			
<p>The Search Division considers that the present application, or one or more of its claims, does/do not comply with the EPC to such an extent that a meaningful search into the state of the art cannot be carried out, or can only be carried out partially, for these claims.</p> <p>Claims searched completely :</p> <p>Claims searched incompletely :</p> <p>Claims not searched :</p> <p>Reason for the limitation of the search:</p> <p>see sheet C</p>			
Place of search		Date of completion of the search	Examiner
MUNICH		24 November 2003	Daintith, N
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>&amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.92 (P04C07)





European Patent  
Office

INCOMPLETE SEARCH  
SHEET C

Application Number  
EP 01 11 8408

Claim(s) searched incompletely:

3

Claim(s) not searched:

1,2

Reason for the limitation of the search:

Claims 1 and 2 are directed to a stent but they do not comprise any technical features of a stent and hence no search can be carried out on these claims due to a lack of clarity, Article 84 EPC.

Claim 3 is directed to a method of manufacturing a stent comprising three steps. Unfortunately, steps 1 and 3 are not clear: step 1 refers to a mechanical method whereas the description lists x-ray, US, CT or MRI; step 3 is linguistically totally unclear. Due to this lack of clarity, a meaningful search of the subject-matter of claim 3 as filed is not possible. The examiner has interpreted claim 3 in the light of the description and searched the following features:

A method of manufacturing a stent to have the individual dimensions of particular internal tubular organ of the patient, comprising the steps of measuring the internal tubular organ of the patient by x-ray, US, CT or MRI, making a master in accordance with the shape-information in which the master has a three-dimensional inner surface or outer surface substantially similar to the inner shape of the tubular organ, and wrapping a wire made of an alloy having shape memory characteristics around the master.

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 11 8408

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-11-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5554181 A	10-09-1996	AU 682772 B2	16-10-1997
		AU 2479195 A	29-11-1995
		CA 2189354 A1	16-11-1995
		EP 0758215 A1	19-02-1997
		JP 9512194 T	09-12-1997
		WO 9530385 A1	16-11-1995
US 5766237 A	16-06-1998	US 5683448 A	04-11-1997
		US 5405377 A	11-04-1995
		US 2002116051 A1	22-08-2002
		US 6174328 B1	16-01-2001
		US 6387122 B1	14-05-2002
		US 5665115 A	09-09-1997
		DE 4407079 A1	29-09-1994
		FR 2702954 A1	30-09-1994
		JP 7047134 A	21-02-1995
		DE 9321363 U1	19-06-1997
		DE 69309132 D1	30-04-1997
		DE 69309132 T2	03-07-1997
		EP 0556850 A1	25-08-1993
		EP 0749729 A2	27-12-1996
US 5147370 A	15-09-1992	AT 158161 T	15-10-1997
		AU 2237792 A	12-01-1993
		DE 69222305 D1	23-10-1997
		DE 69222305 T2	16-04-1998
		EP 0588959 A1	30-03-1994
		WO 9222263 A2	23-12-1992
US 5830179 A	03-11-1998	AU 730446 B2	08-03-2001
		AU 2727397 A	29-10-1997
		CA 2251327 A1	16-10-1997
		EP 0909199 A1	21-04-1999
		JP 2000508207 T	04-07-2000
		US 2002151967 A1	17-10-2002
		WO 9737717 A1	16-10-1997
		US 5928217 A	27-07-1999
		US 6174305 B1	16-01-2001
		US 6139536 A	31-10-2000
		US 6416545 B1	09-07-2002

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82